Packaging Document

signify

front

PHILIPS

RS350 G2 LED Recessed Spot
RS350 G2 LED 射灯

Mounting Instructions
安装说明书

GB 7000

Ta 25°C

Max. 40°C Min. -20°C

20 26 TYPE Z 38 57

Model Name 产品型号	Product Description 产品描述	Lum. Power 整灯功率	Total Lumen 总流明	Beam Angle 光束角	CCT 色温	CRI 显色指数	Vol./Freq. 电压/频率	Classification 灯具类型	
9290032208	RS350 G2 SF Sq L100 11W 30K 24D 1H	11W	1000lm	24°	3000K	90	220-240V ~ 50/60Hz	Class II	0.7
9290032209	RS350 G2 SF Sq L100 11W 30K 50D 1H	11W	1000lm	*50°	3000K				
9290032210	RS350 G2 SF Sq L100 11W 40K 24D 1H	11W	1080lm	24°	4000K				
9290032211	RS350 G2 SF Sq L100 11W 40K 50D 1H	11W	1080lm	*50°	4000K				
9290032212	RS350 G2 SF Sq L100 9W 30K 24D 1H	9W	730lm	24°	3000K				
9290032213	RS350 G2 SF Sq L100 9W 30K 50D 1H	9W	730lm	*50°	3000K				
9290032214	RS350 G2 SF Sq L100 9W 40K 24D 1H	9W	800lm	24°	4000K				
9290032215	RS350 G2 SF Sq L100 9W 40K 50D 1H	9W	800lm	*50°	4000K				

* 50°不可旋转

Dimensions/尺寸图

Product tpye 产品类型	A	B	C
RS350 G2 L100	100	100	140



(9W/11W)

Unit/单位: mm

1



Connect the luminaire to the power supply cable with a terminal box (not provided by Signify).
根据灯具出线规格和电源布线，使用合适的接线盒连接灯具和电源线。(昕诺飞不提供接线盒)

size: 148.5mmx210mm

back

1. Please read this manual before you start to install the luminaire.
2. The luminaire is complied with IEC60598-1,IEC60598-2-2(GB7000.1,GB7000.202).
3. The luminaire shall be installed by a qualified electrician according to specified step, and wired in accordance with the latest IEE electrical regulations or the national requirements.
4. TURN OFF the power during installation or maintenance to avoid electrical shock.
5. Luminaire must not be used or stored in corrosive environment where hazardous materials such as Sulphur, Chlorine, Phthalates, etc., are present.

合格证 QC PASS 01

Installation/安装

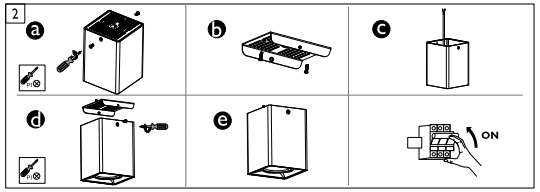

3

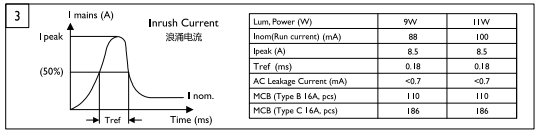

Lum. Power (W)	9W	11W
Inom(Run current) (mA)	88	100
Ipeak (A)	8.5	8.5
Tref (ms)	0.18	0.18
AC Leakage Current (mA)	<0.7	<0.7
MCB (Type B 16A, pcs)	110	110
MCB (Type C 16A, pcs)	186	186

产品中有害物质的名称及含量

部件名称	有害物质 铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
LED灯板/光源	O	O	O	O	O	O
驱动器（板）、调制及电子零部件	×	O	O	O	O	O
透镜/光学部件	O	O	O	O	O	O
外壳及其它零部件	O	O	O	O	O	O

本表格依据SJ/T 11364的规定编制
O：表示该有害物质在该部件所有均质材料中的含量均在GB/T 26572规定的限量要求以下。
×：表示该有害物质至少在该部件的某一均质材料中的含量超出GB/T 26572规定的限量要求。

* 此表格仅适用中国产品。

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. and are used under license

Signify (China) Investment Co., Ltd.
Building No. 9, Lane 888, Tianlin Road, Minhang District, Shanghai, China. Postal code：200233
Service hotline: 8008 201 201, 4009 201 201

昕诺飞（中国）投资有限公司
中国上海市闵行区田林路888弄9号楼
邮编：200233
服务热线: 8008 201 201 4009 201 201

3241 659 86731
© 2022 Signify Holding

size: 148.5mmx210mm

SIGNIFY	
Brand	Other brand
Product Family	LED
Shape	
Wattage	11
Template Ref.	N/A
SGS number	7114961
12-NC.NBR	324165986731
Masterdrawing	NA
CRC Ref.	
Barcode No.	6922341958762
Operator(s)	Jenny.zhu
VERSION No.	V1
Date in	
Date amended	20220928

Black Diecut

Date Check

Check briefing Traffic

Artwork document

Legend | Number of colors
12NC | Trapping/Bleed
Barcode | Images hires
Diecut | Jobsizes

Approval

QC Lithographer	SGS Shanghai Production
Product Manager	skylar.shi@signify.com
Traffic Manager	Sadie Shen

Acrobat PDF View Setting

确保PDF显示正确，请按以下设定叠印预览：

Step 1



Step 2



Step 3



© 2018 Signify Holding
All rights are reserved. Reproduction in whole or part is prohibited without the written consent of the copyright owner.

Document Info

Code 12NC:	Designer:
324165986731	Design date: 2022-10-12

Description:

RS350 G2 SF Sq L100 11W 30K 24D 1H

Basic Info

Duplexbox: 324165986731
EANI number: 6922341958762
Die-Cut: NA
Surface treatment: N/A
CRC: CRC000

Change Info

Author	Date	Change number	Revision description
SH SGS	2022/10/12		

PCC - SHANGHAI A4 DOCUMENT TYPE:114